



Rival CM4015 Base Plate Replacement

Prerequisite Only

Written By: Jacob Hanson






TOOLS:


- [Tri-point Y0 Screwdriver](#) (1)
-

Step 1 — Base Plate

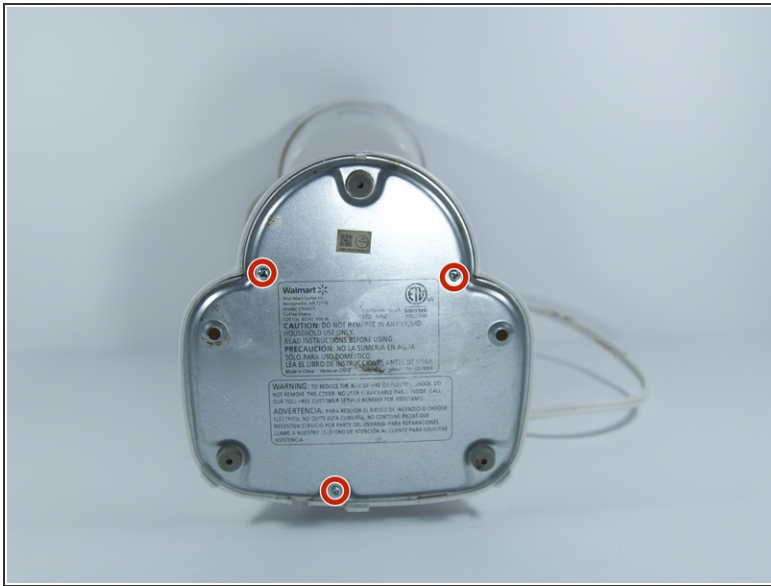

- Remove the three 16mm Tri-Point screws from the base plate.

Step 2

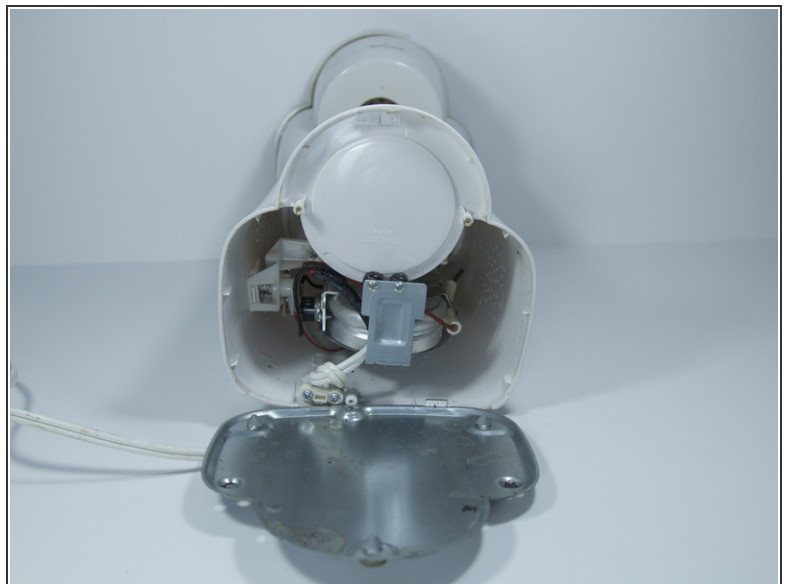

- Remove the base plate by pressing the plastic body away from the metal plate with your thumbs.

To reassemble your device, follow these instructions in reverse order.

